


KING'S FIBREGLASS Pty Ltd

www.kingsfibreglass.com.au

Slide Installation Instructions

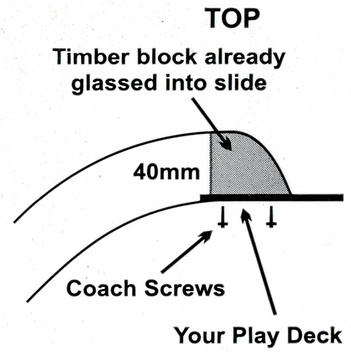

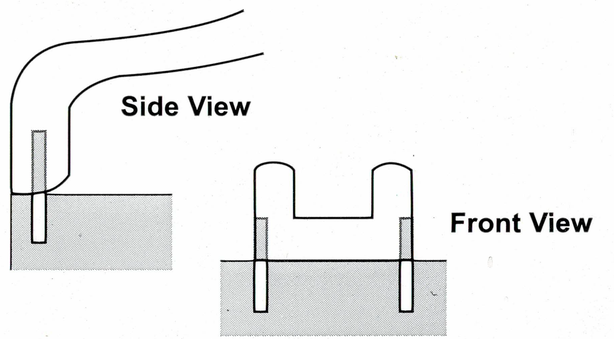



CAUTION

Children under the age of 12 should be supervised by an adult

THIS INFORMATION SHOULD BE FILED FOR FURTHER REFERENCE

BASIC MAINTENANCE: **DO NOT** cover with a sheet plastic or other non-porous materials which can trap moisture between the cover and the surface. Wash the surface with a mild detergent. For best results, use cleaner recommended for fibreglass and follow label directions. **DO NOT** use automatic dishwasher detergent, abrasives, bleaches, strong chemicals with acids/bases or ammonia. Wax at least twice yearly to restore gloss and protect the finish. Use only wax recommended for fibreglass and follow instructions carefully. **NEVER** wax a gelcoat surface in direct sunlight.

CORRECTIVE PROCEDURES: Scratches and Nicks – Most will be removed by using a rubbing compound followed by waxing as described above. Deep marks or gouges should be professionally repaired. Stains – most will be removed by washing with a mild detergent. For stubborn stains, use a fine abrasive household cleanser followed by waxing to restore original luster. Non water soluble stains such as grease and oil, rubber heel marks, etc. can often be removed by using a solvent such as acetone, rubbing alcohol, toluene or xylene, followed by a mild detergent. If these solvents are not effective, try a rubbing compound or fine sanding followed by waxing.

THIS IS A KING'S FIBREGLASS PRODUCT AND ANY ATTEMPT TO COPY WILL RESULT IN LEGAL ACTION